

03-23-00

A

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.	7995	Total Pages	38
---------------------	------	-------------	----

First name inventor or Application Identifier

PETER WORTHINGTON HAMILTON et al.

Express Mail Label No. EL431581403US

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents.

ADDRESS TO:

 Assistant Commissioner for Patents
 Box Patent Application
 Washington, D.C. 20231
1. ☒ Fee Transmittal Form

(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages [27]

(preferred arrangement set forth below)

- Descriptive Title of the Invention

- Cross References to Related Applications

- Statement Regarding Fed sponsored R&D

- Reference to Microfiche Appendix

- Background of the Invention

- Brief summary of the Invention

- Brief Description of the Drawings (if filed)

- Detailed Description

- Claim(s)

- Abstract of the Disclosure

3. ☒ Drawing(s) (35 USC 113) Total Sheets [11]

4. Oath or Declaration

a. ☐ Newly executed (original or copy)
 b. ☐ Copy from a prior application (37 CFR 1.63(d))
 (for continuation/divisional with Box 17 completed)
 [Note Box 5 below]
i. ☐ DELETION OF INVENTORS

Signed statement attached deleting inventor(s) named in the Prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. /

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☐ New correspondence address below

NAME	Paul M. Ulrich				
ADDRESS	The Procter & Gamble Company				
CITY	8611 Beckett Rd.	STATE	Ohio	ZIP CODE	45069
COUNTRY	U.S.	TELEPHONE	(513) 634-9143	FAX	(513) 634-6108

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

FEE TRANSMITTAL FORM

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16 (c))	- 20	42	x \$18.00 =	\$756
	INDEPENDENT CLAIMS (37 CFR 1.16 (c))	- 3	1	x \$78.00 =	\$78
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			+ \$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
				Total of above Calculations =	\$1,524.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,524.00

19. The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-2480. A duplicate copy of this sheet is enclosed.


- a. ☒ Any patent application filing fees required under 37 CFR 1.16.
b. ☒ Any patent application processing fees under 37 CFR 1.17.

20. The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-2480. A duplicate copy of this sheet is enclosed.

- a. ☒ Any patent application processing fees under 37 CFR 1.17.
b. ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
c. ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

21. The total number of duplicate copies enclosed is 2. The Commissioner is hereby authorized to make any additional copies of this sheet needed to accomplish the purposes provided for herein and to charge any fee for such copies to Deposit Account No. 16-2480.


22. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Paul M. Ulrich Registration No. P-46,404
SIGNATURE	
DATE	March 22, 2000

"Express Mail" mailing label number EL431581403US

Date of Deposit March 22, 2000

I hereby certify that this paperfile is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Assistant Commissioner for Patents, Washington, D.C. 20251

Name Paul M. Ulrich
Signature 

P&G Case 7995

HIGH BOND STRENGTH, REPOSITIONABLE ADHERENT SHEET

**PETER W. HAMILTON
KENNETH S. MCGUIRE
JAMES E. POLAND
ANDREW L. BOUTHILET
LEONARD W. LEWIS**

FIELD OF THE INVENTION

The present invention relates to flexible sheet materials having an adhesive for providing a high bond strength and having outermost surface features for preventing premature adhesion to an contact surface such as a target surface. Even more particularly, the present invention relates to repositionable wall covering, tapes, labels, etc. comprising a flexible film having protrusions that act to space an adhesive from a target surface until the wall covering is pressed thereagainst.

BACKGROUND OF THE INVENTION

Decorative sheet-like materials, such as wall coverings are well known in the art. Such sheet materials are generally formed of paper, plastic, metal foil, fabric material or some combination thereof having a pattern or design printed or embossed on the front surface, with the back surface being coated by the user with an adhesive, such as glue, cement, or the like (generally known as "wallpaper paste") by which the wall covering may be bonded to a wall, ceiling or other target surface.

Other types of wall coverings include those having a plastic decorative surface and a backing of woven or non-woven fabric or paper. The back surface is adapted to be coated by the user with the adhesive set forth above in order to secure the wall covering to a surface. However, users dislike the inconvenience of mixing and applying the paste. Additionally, there are prepasted wall coverings available. However, these prepasted wall coverings need a water trough and this can be both time consuming and messy. Also, both the non-prepasted and prepasted wall coverings require the user to perform additional steps to apply the wall covering to the target surface. Generally, once these conventional wall coverings are applied to the target surface, only slight adjustments in their position upon the target surface may be made before the adhesive cures.

To eliminate the additional steps and mess of using “wallpaper paste”, wall coverings have attempted to use pressure sensitive adhesives. Pressure sensitive adhesives are known to provide immediate adhesion between two materials upon contact. Such adhesives rely on quick set-up reaction or rapid cure time for prompt adhesion. In the art of tapes, labels, wall coverings and other articles using pressure sensitive adhesives to adhere an adhesive coated surface to a target surface, there has been recognized the problem of premature adhesion or sticking to contact surfaces, such as a target surface. That is, before the adhesive coated surface can be properly positioned over a target surface, inadvertent contact of the adhesive with the target surface causes premature adhesion at one or more locations, thereby inhibiting proper positioning. For example, due to this premature sticking to the target surface, wall coverings are very difficult to apply to a wall and then reposition, as occurs when lining up the patterns of at least two wall covering sheets.

To reduce this premature adhesion to contact surfaces, pressure sensitive adhesive wall coverings have typically used adhesives with a low bond strength or tack to attach it to the target surface. However, this creates an additional problem in that the wall coverings lack sufficient tack to maintain attachment to the target surface for long periods of time. Because of this low tack, over a period of time the user experiences the wall covering peeling from the wall especially at the sheet margins.

However, pressure sensitive adhesives (“PSA”) with a higher bond strength or tack, i.e., aggressive or permanent pressure sensitive adhesives, generally have not been used to combat the problem of insufficient tack. This is due to the fact that these permanent PSA’s are very tacky and tenacious and thus become very difficult to handle and use. For example, the wall covering will prematurely adhere to contact surfaces, such as the user’s hands or the target surface. Once the adhesive has made premature contact with the surface, the user generally cannot remove the wall covering or even make slight adjustments in its position without destroying the wall covering or significantly reducing the bond strength. Therefore, most PSA wall coverings use low tack PSA’s in an attempt to make the wall coverings easy to use. However, as mentioned above, even these low tack PSA’s can cause the problem of premature adhesion to a contact surface. Although the user can generally separate the low bond strength wall covering from the contact surface without destroying the wall covering, it still frustrates the user and wastes the user’s time.

Others have tried to solve the problem of premature adhesion to contact surfaces by applying a removable release paper to the adherent sheet material such as found for example in U.S. Patent No. 5,487,929 issued to Rusincovitch, Jr. et al. on January 30, 1996. However, this release paper adds additional costs to the sheet material and requires both the manufacturer and user to perform additional steps. Others have also tried to solve the specific problem of premature adhesion of a adherent, decorative sheet material by placing solid protrusions as spacers between the decorative sheet and the target surface such as also found in U.S. Patent No. 5,487,929, issued January 30, 1996, to Rusincovitch, Jr. et al. However, these protrusions are solid and thus require more material and do not completely collapse.

Still others have tried to solve the problem of premature adhesion of an adherent sheet material to contact surfaces by placing spacers to separate the pressure sensitive adhesive from the target surface, such as found, for example, in U.S. Patent No. 4,376,440 to Whitehead et al., U.S. Pat. No. 5,141,790 to Calhoun et al., U.S. Pat. No. 4,959,265 to Wood et al., U.S. Pat. No. 5,344,693 to Sanders, U.S. Pat. No. 4,061,820 to Magid et al., and European Patent Application No. 0 623 332 A1 to Lauritzen. Generally, this art has focused on the use of stand-offs with pressure sensitive adhesives primarily in the area of sanitary napkins. However, different solutions are needed for flexible, adherent sheet materials having protrusions intended to be adhered to smooth or rigid surfaces. Commonly assigned, U.S. Patent Nos. 5,662,758 issued to Hamilton et al. on September 2, 1997, and 5,871,607 issued to Hamilton et al. on February 16, 1999, provide a thorough description of the art in adherent sheets protected from premature adhesion and are herein incorporated by reference.

Both of these commonly assigned patents involve adherent sheets which are protected from premature adhesion to a contact surface via hollow protrusions. However, generally, neither deal with wall coverings, labels or other adherent sheet materials having protrusions with either an additional substrate or a high bond strength.

It is well known in the art to bond a substrate to a flat film such as by laminating the two together using pressure and a laminating adhesive. However, if the film is formed with hollow protrusions then a problem exists in how to combine the substrate with the film that has hollow protrusions without crushing the film protrusions. Additionally, once the substrate is bonded to the film, an additional problem of air entrapment within the protrusions is created. For example, the substrate and potentially

the laminating adhesive may now have created a gas barrier that prevents air from escaping from the protrusions when the protrusions are made to collapse. If the air does not escape from the protrusion, the protrusion may not fully collapse and thus prevent full adhesion of the sheet material to the target surface.

U.S. Patent No. 5,906,883, issued May 25, 1999, to Blanc-Brude, discusses plurality of interconnected non-adherent elements made from a substrate. However, it is believed that this requires a difficult process to make.

Therefore, such adherent sheet materials leave room for improvement in ease of use and manufacture, cost, repositionability and bond strength.

Accordingly, it would be desirable to provide an improved multi-layered, adherent sheet material which is inexpensive to make, has means for protecting the adhesive from prematurely adhering to contact surfaces yet is efficient to store and ship.

It would also be desirable to provide such a material which is easily handled and manipulated by a user during the application process and is repositionable, yet forms an adequate bond with a variety of materials and surfaces to effectively adhere to the target surface.

It would also be desirable to provide a wall covering which is easily handled and manipulated by a user during the application process and is repositionable, yet forms an adequate bond against a variety of materials and surfaces to effectively adhere to the target surface.

SUMMARY OF THE INVENTION

An adherent sheet material including at least one adhesive, non-raised region protected from inadvertent adherence to a contact surface. This adherent sheet material also including a film having a front face and back face, wherein the front face has a plurality of collapsible, non-adhesive protrusions extending outwardly from the front face and adhesive, non-raised region disposed between the protrusions. Also, a substrate is bonded to the back face of film.

An adherent sheet material including at least one adhesive, non-raised region protected from inadvertent adherence to a contact surface. This adherent sheet material

also including a film having a front face and back face, wherein the front face has a plurality of collapsible, non-adhesive protrusions extending outwardly from the front face and adhesive, non-raised region disposed between the protrusions. The film also includes a number density of protrusions from about 10 protrusions per square inch of the film to about 175 protrusions per square inch of the film. The adherent sheet material has a peel force of at least about 0.3 pounds per linear inch.

An adherent sheet material including a contact adhesive protected from inadvertent adherence to a contact surface. This adherent sheet material also including a film having a front face and back face, wherein the front face has a plurality of collapsible, non-adhesive protrusions extending outwardly from the front face and adhesive, non-raised region disposed between the protrusions. The film also includes a number density of protrusions from about 50 protrusions per square inch of the film to about 150 protrusions per square inch of the film. Also, the contact adhesive is disposed upon said non-raised regions.

Also included in the present invention is a method for making an adherent sheet material having a film with protrusions, a contact adhesive protected from inadvertent adherence and a substrate bonded to the film. The sheet being adherable to a target surface only when pressed thereagainst. The method includes coating a forming drum with a contact adhesive. The forming drum has a top surface, wherein this surface has a plurality of recesses therein. This coating step applies the contact adhesive to the top surface without bridging the recesses. The next step in the method is placing a piece of flexible film in contact with the contact adhesive on the top surface of the forming drum. The contact adhesive will preferentially adhere to the piece of flexible film. Then, a piece of flexible film is formed to create a plurality of protrusions extending into the recesses of the forming drum. The plurality of protrusions being registered with the contact adhesive. Also, a substrate is coated with a laminating adhesive and placed in contact with a back face of the film. After this step, the substrate and the film are joined with pressure to form a bonded layer. Finally, the piece of sheet material is removed together with the pressure sensitive adhesive from the forming drum.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the present invention, it is believed that the present invention will be

better understood from the following description in conjunction with the accompanying Drawing Figures, in which like reference numerals identify like elements, and wherein:

Figure 1 is a cross-sectional view of a adherent sheet material embodiment of the present invention;

Figure 2 is a top planar view of the adherent sheet material shown in Figure 1;

Figure 3 is a cross-sectional view of a adherent sheet material shown in Figure 1 in contact with a contact surface;

Figure 4 is a cross-sectional view of a preferred adherent sheet material embodiment in contact with a contact surface;

Figure 5 is a cross-sectional view of a adherent sheet material shown in Figure 4 in contact with a contact surface, wherein a force (F) has been applied to adherent sheet material causing protrusions to collapse;

Figure 6 is an alternative embodiment of a adherent sheet material of the present invention, wherein the laminating adhesive follows the contours of the protrusion along the back face of the film;

Figure 7 is an alternative embodiment of a adherent sheet material of the present invention, wherein the laminating adhesive is discontinuous;

Figure 8 is an alternative embodiment of a adherent sheet material of the present invention, wherein the film is apertured;

Figure 9 is process flow chart of a method for making the composite sheet material of the present invention, disclosing a automated embossing process to form sheet material of the present invention;

Figure 10 is a side elevation view of the nip region of the method for making the composite sheet material of the present invention; and

Figure 11 is a side elevation view of the pressure drum and the female embossing drum, wherein the substrate is bonded to the formed film having protrusions of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to the drawings, and more particularly to FIGS. 1-8, there is shown a preferred embodiment of the present invention, which provides the adherent sheet material and is generally indicated as 10. As shown in FIG. 1 (cross-sectional view), adherent sheet material 10 includes a piece of a flexible film sheet 20 having an operational front face 22, a back face 24, non-adhesive, three-dimensional protrusions 26

extending outwardly from the front face 22 and adhesive, non-raised regions 28 located between the protrusions 26.

Sheet material 10 is a selectively-activatable, adhesive-bearing structure which bonds sheet material 10 to a target surface. The target surface for the adhesive system includes but is not limited to walls, table tops, shelves, etc.

As utilized herein, the term "selectively-activatable" is used to refer to materials which exhibit substantially non-adherent properties when brought into contact with target surfaces until some action is taken by a user to "activate" the material to reveal adhesive properties. Accordingly, selectively-activatable properties differ from permanently-active strips of adhesive which rely upon removal of liner materials (typically silicone-coated paper strips or films) to expose the adhesive for use.

Selective activation of such materials allows the user to properly position sheet material 10 upon a target surface before activation and adhesion are accomplished, as well as minimizing the likelihood of contamination of the adhesive system before use. This characteristic permits the sheet material 10 to be manipulated in any desired mode without encountering the difficulties of premature adhering of the adherent sheet to itself or to other contact surface 50s, and without the need for separate release sheets, liners, microspheres or the like which often need to be removed prior to contact with the target surface. If desired, the selective activation process may be temporary, i.e., minimal contact between adherent, non-raised regions 28 and a contact surface 50 for evaluation of sheet material's 10 position upon target surface and then may be de-activated without destroying sheet material 10 for either removal of sheet material 10 from or repositioning it upon target surface 50 for further use without significant loss of adhesive capability.

Regardless of the manner of activation, materials useful as an adhesive system in accordance with the present invention will exhibit an adhesive, adherent or tacking character as opposed to merely a clinging or affinity character. As utilized herein, the terms "adhesive" is utilized to refer to the ability of a material to exhibit an adherent character whether or not it actually includes a composition commonly understood and labeled as an adhesive. Accordingly, such materials will form a bond or seal when in contact with itself or another target surface as opposed to merely being attracted to such surface. While a number of approaches such as the use of selectively adherent materials

may be utilized to provide the desired adhesive properties, a presently preferred approach is to utilize a pressure sensitive adhesive.

When designing materials useful as an adhesive system in accordance with the present invention, it may be desirable to tailor the particular choice of adhesive material or agent so as to provide either a permanent bond or a releasable bond as desired for a particular application. In accordance with the preferred embodiment of the present invention, depending upon extent of the activation employed, the sheet 10 can demonstrate a releasable bond, i.e., a temporary bond, be either removed without destroying sheet material 10 or repositioned and then activated completely once placed in desired position upon target surface to form a permanent bond between sheet 10 and target surface.

Referring to FIGS. 1-3, sheet material 10 includes adhesive, non-raised regions 28 on film sheet 20 between and around protrusions 26. Adhesive, non-raised regions 28 have adhesive properties which can be achieved in a variety of different ways. One such way to provide non-raised regions 28 adhesive characteristics is to fabricate film sheet 20 from a material that demonstrates adhesive characteristics, including but not limited to plasticized polymers, i.e., polyvinyl chloride, silicones, hydrogels, polyvinylidene dichloride, Kraton Rubber, urethane polymers, plastisols, plasticized waxes, i.e., organic waxes (beeswax), inorganic waxes (paraffin), etc., gelatins and other organic based, proteinaceous materials.

Also, Commonly assigned, U.S. Patent Application No. 08/745,340, filed November 8, 1996 in the name of Hamilton et al. describes materials that exhibit adhesive or "cling" properties and is herein incorporated by reference. As discussed above, such materials can exhibit adhesive or "cling" properties on a constant basis, such that they cling to themselves and to other surfaces whenever brought into proximity with them, whether desirable or not. Such materials often incorporate resins, additives, tackifiers, or other materials to achieve the target level of cling. Suitable methods of measuring and quantifying this cling property are described in ASTM test methods D5458-95 and D3354-89. Test method D5458-95 is useful for measuring cling between two layers of film in both stretched and unstretched conditions, and utilizes a 1 inch wide film strip adhered to a flat film attached to an inclined surface. The force required to remove the film strip from the flat film is measured. Test method D3354-89 is useful for measuring the degree of blocking (unwanted adhesion) existing between overlapping layers of

plastic film. Film-to-film adhesion is expressed as a blocking load in grams which will cause two layers of film to separate with an area of contact of 100 square centimeters.

Another such way to provide the non-raised regions 28 adhesive characteristics is to fabricate film sheet 20 from materials with activated adhesive systems, including but not limited to water activated adhesives, ultraviolet light activated systems, encapsulated adhesive, anaerobic, i.e., cyanoacrylates.

Again, referring to FIGS. 1-3, a third way to provide non-raised regions 28 of film sheet 20 with adhesive characteristics is to dispose upon or coat on a surface of non-raised regions 28, preferably a contact adhesive 12, including but not limited to a pressure sensitive adhesive ("PSA").

Generally, the pressure sensitive adhesive (PSA) useful in the invention can be any adhesive known to those skilled in the art, including but not limited to elastomeric-type PSAs comprising natural rubber, reclaimed rubber, styrene-isoprene-styrene rubber, butadiene-acrylonitrile rubber, polyvinyl ether rubber, styrene-butadiene-styrene rubber, butyl rubber, polyisobutylene rubber, nitrile rubber, styrene-butadiene rubber, polyurethane, polysulfide, polyesters, silicone resins and gums, neoprene rubber, acrylic, methacrylic, polyacrylate ester rubber, and vinyl and mixtures thereof.

Contact adhesive 12 is preferably a pressure sensitive adhesive, also preferably a hot melt adhesive, most preferably an adhesive of specification number X 801 334 03, made by Ato Findley Co. of Wauwatosa, Wisconsin. Contact adhesive 12 may be refastenable, releaseable, permanent, or otherwise. The size, shape and spacing of protrusions 26 is preferably selected to provide a continuous contact adhesive 12 path surrounding protrusions 26 but is not necessary to practice the invention and thus a discontinuous adhesive path could be applied upon non-raised regions 28. Contact adhesive layer 12 has a thickness of X which is preferably from about 0.001 inches to 0.010 inches, most preferably 0.002 inches of pressure sensitive adhesive.

If film sheet 20 is fabricated from a material having adhesive properties in order to provide non-raised regions 28 an adhesive property, then protrusions 26 being made of the same material would need some type of non-adhesive coating ("cappers") to permit sheet material 10 to slide or be repositioned over contact surface 50. The cappers can be applied minimally over protrusion apex 27 of protrusions 26, preferably the entire surface

of each of protrusions 26. These cappers demonstrate non-adhesive properties and include but are not limited to silicones, inorganic powders, i.e., talc, powdered mica, calcium carbonate, etc., inks and other non-tacky coatings well known in the art. These non-adhesive cappers, prevent the activation of film sheet's 20 adhesive properties, thus permitting repositionability and preventing premature adhesion to a contact surface 50 of sheet 10.

If film sheet 20 is fabricated from a material having adhesive properties that require an intentional activation to activate the adhesive properties of the material, then protrusions 26 do not require any type of non-adhesive, coating or cap. The user will selectively activate only the adhesive properties of adhesive, non-raised regions 28 and not the adhesive properties of non-adhesive, protrusions 26.

Still referring to FIGS. 1-3, film sheet 20 is preferably fabricated from a polymer that does not have adhesive characteristics, which may be made from homogeneous resins or blends thereof. Single or multiple layers within the film structure are contemplated, whether co-extruded, extrusion-coated, laminated or combined by other known means. Useful resins include, but are not limited to, polyethylene (PE), polypropylene (PP), polyethylene terephthalate (PET), polyvinyl chloride (PVC), polyvinylidene chloride (PVDC), latex structures, nylon, etc. Polyolefins are generally preferred due to their lower cost and ease of forming but are not necessary to practice the invention. High density polyethylene (HDPE) is most preferred to fabricate the film sheet. Other suitable materials to fabricate the film from include, but are not limited to, aluminum foil, coated (waxed, etc.) and uncoated paper, coated and uncoated wovens, scrims, meshes, nonwovens, and perforated or porous films, and combinations thereof. In a particularly preferred embodiment, the flexible film sheet material is a formed film from about 0.0001 inch to about 0.005 inches, more preferably about 0.001 inch thick film.

Protrusions 26 are discreet, collapsible three-dimensional outermost surface features formed from film sheet 20. Protrusions 26 extend outwardly from the front face 22 in a substantially perpendicular direction, occupying a voided space 25 under protrusions 26 (FIG. 1). Protrusions 26 have heights (H) which are preferably less than their diameters D1, so that when they collapse, they collapse along an axis which is substantially perpendicular to a plane of sheet 10. This mode of collapse avoids protrusions 26 folding over and blocking adhesive 12 from contact with a target surface 50. Commonly assigned, U.S. Patent Nos. 5,662,758 issued to Hamilton et al. on

September 2, 1997, and 5,871,607 issued to Hamilton et al. on February 16, 1999, and commonly assigned, U.S. Patent Application Nos. 08/745,340, filed November 8, 1996 in the name of Hamilton et al. and 09/369,743, filed August 6, 1999 in the name of Hamilton et al. provide detailed information on adherent sheets having formed film sheets with protrusions and are herein incorporated by reference.

Protrusions 26 are collapsible in that they are hollow protrusions that, once placed under a significant applied pressure, deform from a substantially three-dimensional structure (as shown in FIG. 1) to a substantially two-dimensional structure (as shown in FIG. 5). The term "discrete" is used herein to refer to the fact that film sheet 20 separates voided spaces 25 of each protrusion 26, i.e., protrusions 26 are not interconnected to any other individual protrusion 26. In other words, the air entrapped within the voided space 25 of one of protrusion 26 cannot travel to any of the other protrusions 26.

Protrusions 26 are preferably domed-shaped but can be a variety of shapes without changing the scope of the invention, such as conical, cylindrical, hemispherical, toroidal and pyramidal. Preferably, protrusions 26 have a protrusion apex 27 which is a point on protrusions 26 having the greatest perpendicular distance from the front face 22 of the film sheet 20.

The number density of protrusions 26, i.e., the number of protrusions per square inch, is an important parameter in the context of the present invention because it is one determination of the compressive strength of protrusions 26. The term "compressive strength" is used herein to refer to a perpendicularly applied force (F) a particular three-dimensional sheet can support for a given amount of sheet deflection. For this particular case, protrusion 26 deflection is analogous to sheet deflection. This information is important because it quantifies the perpendicularly applied force (F) required to deform a particular sheet to a given protrusion height H. Protrusion height (H) is defined as the perpendicular distance from the front face 22 of the film 20 to the protrusion apex 27. For example, from Figure 1, if a thickness (X) of adhesive 12 is coated across the front face 22 of the film sheet 20 such that it fills the adhesive, non-raised regions 28 between protrusions 26, the force (F) could be determined that would deform the sheet 10 to the height (X) of the adhesive 12, thus exposing the adhesive 12 to the contact surface 50.

COMPRESSIVE STRENGTH ANALYTICAL TEST METHOD

This test was used to determine the compressive strength of the film sheet 20 at different levels of protrusion 26 deformation.

5 A circular sample with a diameter of 0.8 inches was cut from the film sheet material. The circular sample was then placed on the lower, stationary platform of an INSTRON brand model 8511 compression tester (available from INSTRON Corporation, Caston, Mass.). The upper moveable platform of the compression tester was then lowered until it barely came in contact with the sheet's protrusions. The three-
10 dimensional sample was then fully compressed into a substantially two-dimensional sheet at an upper platform rate of 0.05 pounds per second. The compression tester was operated by the INSTRON Plus 8500 display unit in load control running from 0 to 10 pounds. Displacement of the upper platform and compressive load were measured and recorded throughout the test on an oscilloscope.

15 Based upon this test method, the present invention had a compressive strength of at least about 0.1 pound per square inch, preferably of at least about 1 pound per square inch, more preferably from about 0.5 pounds per square inch to about 15 pounds per square inch, even more preferably from about 3 pounds per square inch to about 10
20 pounds per square inch before contacting adhesive, non-raised regions 28, preferably contact adhesive 12..

Referring to FIGS. 1 and 2, the protrusions 26 have a protrusion height (H) preferably from about 0.01 inches to about 0.1 inches, more preferably 0.015 inches to
25 about 0.040 inches, even more preferably 0.20, most preferably 0.025 inches and a base surface area from about 0.001 square inches to about 0.0065 square inches, most preferably 0.004 square inches. In the preferred embodiment, the base surface area (SA) is calculated by the formula of $SA = \frac{1}{4}\pi (D1)^2$. In a even more preferred embodiment, protrusions 26 have a base diameter (D1) from about 0.030 inches to about 0.10 inches,
30 more preferably from about 0.040 inches to about 0.09 inches, most preferably 0.070 inches. Center-to-center spacing (C) of protrusions 26 can be randomly spaced using the method described in commonly assigned, U.S. Patent No. 5,965,235, issued to McGuire et al. on October 12, 1999, and herein incorporated by reference. FIG. 2 shows a preferred embodiment in which center-to-center spacing (C) is uniformly spaced, more
35 preferably from about 0.05 inches to about 0.15 inches, even more preferably from about 0.07 inches to about 0.115, most preferably 0.105 inches.

FIGS. 3 and 4 show a contact surface 50, which may be smooth and rigid and is typically non-deformable, being spaced away from layer of contact adhesive 12 by protrusions 26. Contact surface 50 is defined as a surface generally parallel to front face 22 of film sheet 20 which contacts the protrusions 26 preferably at their protrusion apex 27. Contact surface 50 can be a variety of surfaces which sheet material's 10 adhesive layer 12 could come in contact with, such as a user's hand, drum, rollers, the sheet material itself and target surfaces such as walls, table tops, shelves, windows, etc.

Film protrusions 26 prevent the contact adhesive 12 from contacting any contact surfaces until the film 20 is intentionally pressed against desired contact surface 50, i.e. target surface 50. The adherent sheet material 10 is applied to contact surface 50 wherein the film protrusions 26 make contact with contact surface 50 and thus protect the contact adhesive 12 from contacting contact surface 50. The protrusions 26 prevent the premature adhesion of the adherent sheet 10, such as a wall covering, from prematurely adhering to the contact surface 50. This also permits the user to position sheet material 10 upon target surface 50 and then reposition, i.e., slide, sheet 10 to another position numerous times without destroying sheet material 10 or substantially reducing contact adhesive's 12 tack.

In particular, FIG. 4 shows a preferred embodiment of adherent sheet material 10 further consisting of a substrate 40 bonded to back face 24 of film sheet 20. This substrate 40 may be bonded to the back face 24 of the film sheet 20 by any type and method that suits the needs of the application. For example, they may be bonded together by way of heat-sealing, ultrasonic welding, preferably a laminating adhesive 30, including but not limited to slot coating and spray coating, , etc., most preferably spray coating.

Especially useful but not necessary for this lamination is a tacky PSA, including but not limited to all the PSA's mentioned in the detailed description of contact adhesive 12 set forth above. The protrusion's 26 tendency to rebound to its' undeformed height can cause the sheet 20 to lose some or all of its' adherence to the target surface 50, but when a pressure sensitive adhesive 30 is used between the adherent sheet 20 and the substrate 40, the PSA 30 serves to help maintain the protrusions 26 in a collapsed state due to the adherence of the adhesive layer 30 to the collapsed protrusion 26 as shown in Fig. 5. Similarly, when a pressure sensitive adhesive 30 is applied to the back face contours of protrusions 26 in an alternative embodiment shown of Fig. 6, the same

advantageous effect will be realized. The substrate 40 may be made of a variety of materials currently used as wall coverings, including but not limited to flexible and partially non-flexible foils, fabric, plastic films, and papers.

FIG. 5 also shows protrusions 26 collapsed under a force as indicated by force (F), applied to back face 24 of film sheet 20,. Once protrusions 26 collapse, non-adhesive region 28, preferably contact adhesive 12, is caused to adhere to contact surface 50. This adhesion can be permanent or temporary depending upon how many protrusions 26 were collapsed. For example, if only a minimal number of protrusions are collapsed, sheet 10 will temporarily bond to target surface 50 because only a small percentage of contact adhesive 12 is adhered to contact surface 50. This temporary adhesive state allows the user to evaluate the position of sheet material 10 upon target surface 50 for only a very short time period; and if it is not in a desired position, remove sheet material from target surface and reposition it upon the target surface 50. When the user has found the final position of the wallpaper, a compressive force is applied to entire substrate 40 substantially perpendicular to a plane of sheet 10, thus deforming film protrusions 26. This exposes the adhesive 12 to the target surface 50 and thus preferably provides a permanent adherence for sheet material 10. The substrate 40 is then the outermost layer and may contain a decorative pattern such as is found in wall coverings. This sheet material 10 may be combined as a kit with instructions for use, consisting of the following instructions:

(a) positioning sheet material 10 on target surface 50 with front face 22 in contact with surface 50, until sheet material 10 is in desired location upon target surface 50; and

(b) applying a force (F) perpendicular to and across the substrate sufficient to collapse the collapsible protrusions 26, whereby the contact adhesive 12 comes in contact with the surface 50.

In an alternative embodiment, a low tack contact adhesive, including but not limited to low tack PSA's, can be applied to the protrusion "tips" or protrusion apex 27. This low tack PSA would provide enough tack to hold sheet 10 to target surface 50 temporarily, but protrusions 26 would still prevent target surface 50 from contacting adhesive, non-raised regions 28, preferably contact adhesive 12, which consists of a high tack adhesive. Again, once sheet material 10 is position (and repositioned) upon target surface 50, a perpendicular force (F) applied to entire back face 24 of film sheet 20 will collapse protrusions 26 and permanently bond sheet material 10 to target surface 50.

In the preferred embodiment, once the adherent sheet 20 has been selectively activated, it has a peel force of at least about 0.3 pounds per linear inch, preferably at least about 0.5 pounds per linear inch, most preferably a peel force from about 0.5 pounds per linear inch to about 0.9 pounds per linear inch. The term "peel force" is used herein to refer to the force (F) required to peel the adherent system, i.e., sheet 10, from a contact surface 50, i.e., target surface 50, in a substantially perpendicular direction from target surface 50. The peel strength, i.e., peel force, of the adhesive is preferably measured by Pressure Sensitive Tape Council Method PSTC-1. A 12 inch (30.5 cm) long by 1 inch (2.5 cm) wide strip of film is rolled once against a smooth stainless steel surface at a rate of 12 inches (30.5 cm) per minute using a 4.9 pound (2.25 kg) roller and then tested as having an average adhesion value of greater than about 0.3 pounds per linear inch (pli).

When bonding substrate 40 to film sheet 20, substrate 40 will act as a gas barrier, entrapping the air in voided space 25 of protrusions 26, if certain precautions are not taken. This entrapped air can be problem because the air, if not allowed to escape, can prevent protrusions 26 from completely collapsing. There are a variety of ways to approach solving this potential problem of air flow management. The term "air flow management" as used herein refers to the many different ways of providing a path or channel so that the air entrapped within voided space 25 can escaped as protrusions 26 are being collapsed. These air vent paths or channels can be at a macroscopic or microscopic level and either intentionally formed or naturally occurring within film sheet 20, substrate 40 or laminating adhesive 30, either singly or in combination.

To incorporate the air vent channels in sheet material 10, film sheet 20, substrate 40 or laminating adhesive 30, either singly or in combination can be porous, permeable, perforated, discontinuous or apertured.

The term "porous" is used herein to refer to the ability of a material to admit fluids, preferably gas, to pass through its pores or interstices. The term "permeable" is used herein to refer to the ability of material to admit fluids, preferably gas, to pass through its pores or interstices whether intentionally induced or naturally occurring within the material. The term "perforated" is used herein to refer to a plurality of holes punched in a material. The term "discontinuous" is used herein to refer to the intentional use or application of a material that is not a continuous layer of material such that the material does not form a barrier layer to the gas escaping voided space 25 of protrusions 26 when protrusions 26 are collapsed. The term "apertured" is used herein to refer to any hole, slit or opening of any size or shape intentionally formed within such materials.

In a preferred embodiment depicted in FIG. 4, the laminating adhesive 30 and substrate 40 should be either porous, permeable, perforated, discontinuous, apertured or some combination thereof, thereby permitting the protrusions 26 to collapse more completely by displacing any air trapped in the voided volume 25 of the protrusions 26 through the air vent channels within the laminating adhesive 30 and/or substrate 40. For example, one embodiment of the present invention includes both a substrate 40 and laminating adhesive 30 that are either porous or permeable. In another embodiment, both substrate 40 and laminating adhesive 30 are perforated under protrusions 26 such that entrapped air in void space 25 can escape through the perforated air vent channels.

In an alternative embodiment depicted in FIG. 6, substrate 40 is either porous, permeable, perforated, discontinuous, apertured or some combination thereof and laminating adhesive 30 follows the contours of protrusions 26 along back face 24 of film sheet 20 forming non-adhesive regions under protrusions 26. This embodiment does not require adhesive 30 to be discontinuous or permeable to permit protrusions 26 to more completely collapse. In yet another embodiment of sheet material 10, laminating adhesive 30 may be discontinuous by microscopic channels imparted in it by the spray coating process. The laminating adhesive 30 may also be discontinuous by way of macroscopic channels formed by the periodic application of laminating adhesive 30 upon substrate 40 forming a non-continuous path as shown in Fig. 7.

In yet another embodiment of sheet material 10, film sheet 20 is porous, permeable, perforated, discontinuous or any combination thereof and substrate 40 can be gas impermeable or include any of the above mentioned properties to provide additional air vent channels. Other alternative embodiments which allow for trapped air to be displaced from the voided volume 25 of the protrusions 26 through film sheet 20 include, but are not limited to, intentionally permeable sheet material, such as found in paper sheets, breathable sheets (additive), etc.

FIG. 8 shows another alternative embodiment wherein protrusions 26 are apertured on front face 22, as well as the back face 24, of the film sheet 20 forming an opening at protrusion apex 27. Having the protrusions 26 open on both the front face 24 and back face 24 allows for the air trapped in the voided volume 25 of the protrusions 26 to be displaced along a contact surface when compressed.

A method of making is illustrated in Figure 9. The film sheet 20 may be formed by vacuum thermoforming or embossing or other means as shown and described in commonly assigned, U.S. Patent Nos. 5,662,758 issued to Hamilton et al. on September 2, 1997, and 5,871,607 issued to Hamilton et al. on February 16, 1999, and commonly assigned, U.S. Patent Application Nos. 09/289,222, filed April 9, 1999 in the name of McGuire et al. which are herein incorporated by reference. Embossing is the preferred method of making the adherent sheet material 10 and is set forth below.

FIGS. 9-11 show an automated process for making sheet material 10, generally indicated as 60. A drum 64 (hereinafter referred to as "female embossing drum" 64) has an outermost diameter that has patterned depressions. This outermost diameter is treated to have a low surface energy, i.e., a release coating is applied, so that the adhesive 12 will not readily wet it, or in other words, the adhesive 12 will have a greater affinity to the film sheet 20 than the female embossing drum 64. This outermost diameter is then coated with the adhesive 12 by an adhesive deposition system 62 such that the adhesive 12 is only transferred to the outermost diameter of the female drum 64 and is not transferred into the patterned depressions. This adhesive deposition drum 62 is positioned upstream from the female embossing drum 64 and a matching drum 68 with matching patterned male drum pins (hereinafter referred to as "male embossing drum" 68). The male embossing drum 68 is mated with the female embossing drum 64 such that each of the male drum pins on the male embossing drum 68 has a corresponding depression in the female embossing drum 64 into which it engages at a nip region 70.

Automated process 60 introduces a film sheet 20 into this nip region 70 whereby it is permanently, mechanically deformed by the matching set of embossing drums (64 and 68), and their corresponding male drum pins and female drum depressions as shown in FIG. 10. The deformation is such that film sheet 20 retains the three-dimensional shape of the male drum pins of the male embossing drum 68 even after film sheet 20 has left the nip region 70. The film sheet 20 may be preheated to aid in such permanent deformation by radiant heating, conductive heating, convective heating or other methods well known in the art.

At the nip region 70, in addition to being permanently mechanically deformed by the embossing drums, the film sheet 20 also comes in contact with the adhesive 12 that is coated only on the outermost diameter of the female embossing drum 64. Due to the pre-coating on the outermost diameter of the female drum 64, the adhesive adheres itself to

the film sheet 20 in the spaces 28 between and around the film protrusions 26 that are formed through permanent mechanical deformation by the embossing drums. This results in a three-dimensional formed film sheet 20 with a layer of adhesive 12 surrounding embossed, film stand-off protrusions 26 that have a greater height H than the thickness of the adhesive X.

A method of bonding a film sheet 20 and a substrate 40 to each other is shown in Figures 9 and 11. While the formed film sheet 20 is still integrally connected with the female embossing drum 64, a substrate 40 is laid on the side of the film sheet 20 not in contact with the female embossing drum 64. Before contact with the film sheet 20, a laminating adhesive 30 is deposited on the substrate 40 by a substrate adhesive deposition system 72 by slot coating, or other methods well known in the art. While using a pressure sensitive laminating adhesive 30 is the preferred method to create the bond between the film and the substrate, other methods, such as heat sealing or ultra-sonic welding may also be used.

After initial contact between the film sheet 20 and the substrate 40, or at the point of contact, the film sheet 20 and substrate 40 are joined by pressure from a pressure drum 74, in a direction perpendicular to the plane of the film sheet 20 at that point. Since the formed film sheet 20 is still integrally connected with the female embossing drum 64 when the film sheet 20 and substrate 40 are combined by the pressure drum 74, the film protrusions 26 are protected from deformation under the pressure of the pressure drum 74 by the patterned depressions in the female embossing drum 64. These patterned depressions effectively surround the film protrusions 26, thereby serving as a protective shell that prevents the pressure drum 74 from collapsing the film protrusions 26. The substrate 40 and film 20, which are now bonded together, are then stripped from the female embossing drum 64 by a stripping drum 76.

The protrusion size, shape and spacing, the film flexural modulus, and the film thickness determine the resistance of the protrusions to collapse over a unit area. It is desirable to provide a strength which is sufficient to withstand a pressure up to about 4.4 pounds per square inch without collapsing protrusions to where the adhesive contacts a target surface. This resistance to collapse enables the composite material to be wound onto a drum without damage for compact packaging purposes and to be handled and repositioned without premature adherence to a target surface. A composite material having the most preferred dimensions is believed to provide the desired strength. While particular embodiments of the present invention have been illustrated and described, it will be obvious to those skilled in the art that various changes and modifications may be made

without departing from the spirit and scope of the invention, and it is intended to cover in the appended claims all such modifications that are within the scope of the invention.

20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
22

WHAT IS CLAIMED IS:

1. An adherent sheet material comprising at least one adhesive, non-raised region protected from inadvertent adherence to a contact surface, comprising:
 - a film having a front face and back face, said front face having a plurality of collapsible, non-adhesive protrusions extending outwardly from said front face and said
- 5 adhesive, non-raised region disposed between said protrusions; and
 - a substrate layer bonded to said back face of film.
2. A sheet material according to claim 1, further comprising a contact adhesive disposed upon said non-raised regions.
3. A sheet material according to claim 1, wherein a compressive force of at least about 0.1 psi is required to collapse said protrusions.
4. A sheet material according to claim 3, wherein a compressive force from about 0.5 pounds per square inch to about 15 pounds per square inch is required to collapse said protrusions.
5. A sheet material according to claim 1, further comprising a number density of protrusions from about 10 protrusions per square inch of said film to about 175 protrusions per square inch of film.
6. A sheet material according to claim 5, wherein said density of protrusions is from about 50 protrusions per square inch of said film to about 150 protrusions per square inch of film.
7. A sheet material according to claim 6, wherein said density of protrusions is from about 60 protrusions per square inch of said film to about 90 protrusions per square inch of film.
8. A sheet material according to claim 1, wherein said protrusions having a height from about 0.01 inches to about 0.04 inches.
9. A sheet material according to claim 8, wherein each said protrusion having a protrusion base surface area from about 0.0007 inches to about 0.008 square inches.

10. A sheet material according to claim 9, wherein said protrusions having a center-to-center distance from about 0.05 inches to about 0.15 inches.
11. A sheet material according to claim 10, wherein said protrusions are dome-shaped and have a base diameter from about 0.03 inches to about 0.1 inches.
12. A sheet material according to Claim 1, wherein said film is high density polyethylene having a thickness from about 0.0003 inches to about 0.003 inches.
13. A sheet material according to claim 1, wherein said substrate layer is a member selected from the group consisting of flexible foil, fabric, plastic film and paper.
14. A sheet material according to claim 1, wherein said air venting channel is at least one aperture disposed within a plurality of said protrusions.
15. A sheet material according to claim 14, wherein said protrusions having at least one aperture disposed within a plurality of said protrusions.
16. A sheet material according to claim 1, wherein said substrate is bonded to said back face of said film with a laminating adhesive.
17. A sheet material according to claim 16, wherein said laminating adhesive having air vent channels.
18. A sheet material according to claim 17, wherein said substrate having air vent channels.
19. A sheet material according to claim 16, wherein said substrate under said protrusions is permeable and contains no laminating adhesive .
20. A sheet material according to claim 1, wherein said substrate having air vent channels.
21. An adherent sheet material comprising at least one adhesive, non-raised region protected from inadvertent adherence to a contact surface, comprising:

5 a film having a front face and back face, said front face having a plurality of collapsible, non-adhesive protrusions extending outwardly from said front face and said adhesive, non-raised region disposed between said protrusions, said film having a number density of protrusions from about 10 protrusions per square inch of said film to about 175 protrusions per square inch of said film; and

wherein said adhesive non-raised region having a peel force of at least about 0.3 pounds per linear inch.

22. A sheet material according to claim 21, further comprising a substrate layer bonded to said back face.

23. A sheet material according to claim 22, wherein said substrate layer is a member selected from the group consisting of flexible foil, fabric, plastic film and paper.

24. A sheet material according to claim 22, wherein a compressive force of at least about 0.1 psi is required to collapse said protrusions.

25. A sheet material according to claim 24, wherein a compressive force from about 0.5 pounds per square inch to about 15 pounds per square inch is required to collapse said protrusions.

26. A sheet material according to claim 22, wherein said number density of protrusion is from about 50 protrusions per square inch of said film to about 150 protrusions per square inch of said film.

27. A sheet material according to claim 26, said number density of protrusion is from about 60 protrusions per square inch of said film to about 90 protrusions per square inch of said film.

28. A sheet material according to claim 22, wherein said protrusions having a height from about 0.01 inches to about 0.04 inches.

29. A sheet material according to claim 28, wherein each said protrusion having a protrusion base surface area from about 0.0007 inches to about 0.008 square inches.

30. A sheet material according to claim 29, wherein said protrusions having a center-to-center distance from about 0.05 inches to about 0.15 inches.

31. A sheet material according to claim 30, wherein said protrusions are dome-shaped and have a base diameter from about 0.03 inches to about 0.1 inches.

32. A sheet material according to Claim 22, wherein said film is high density polyethylene having a thickness from about 0.0003 inches to about 0.003 inches.

33. A sheet material according to claim 22, wherein said film having air venting channels.

34. A sheet material according to claim 33, wherein said air vent channel is at least one aperture disposed within a plurality of said protrusions.

35. A sheet material according to claim 22, wherein said substrate is bonded to said back face of said film with a laminating adhesive.

36. A sheet material according to claim 35, wherein said laminating adhesive having air vent channels.

37. A sheet material according to claim 36, wherein said substrate having air vent channels.

38. A sheet material according to claim 35, wherein said substrate under said protrusions is permeable and contains no laminating adhesive .

39. A sheet material according to claim 22, wherein said substrate having air vent channels.

40. An adherent sheet material comprising a contact adhesive protected from inadvertent adherence to a contact surface, comprising:

a film having a front face and back face, said front face having a plurality of collapsible protrusions extending outwardly from said front face and non-raised regions disposed between said protrusions; and

said adhesive disposed upon said non-raised regions, said film having a number density of protrusions from about 50 protrusions per square inch of said film to about 150 protrusions per square inch of said film.

41. A sheet material according to Claim 40, further comprising a substrate layer bonded to said back face.

42. A sheet material according to Claim 41, wherein said substrate layer is a member selected from the group consisting of flexible foil, fabric, plastic film and paper.

43. A sheet material according to claim 41, wherein a compressive force of at least about 0.1 psi is required to collapse said protrusions.

44. A sheet material according to claim 43, wherein a compressive force from about 0.5 pounds per square inch to about 15 pounds per square inch is required to collapse said protrusions.

45. A sheet material according to claim 41, said number density of protrusion is from about 60 protrusions per square inch of said film to about 90 protrusions per square inch of said film.

46. A sheet material according to claim 41, wherein said protrusions having a height from about 0.01 inches to about 0.04 inches.

47. A sheet material according to claim 46, wherein each said protrusion having a protrusion base surface area from about 0.0007 inches to about 0.008 square inches.

48. A sheet material according to claim 47, wherein said protrusions having a center-to-center distance from about 0.05 inches to about 0.15 inches.

49. A sheet material according to claim 48, wherein said protrusions are dome-shaped and have a base diameter from about 0.03 inches to about 0.1 inches.

50. A sheet material according to Claim 41, wherein said film is high density polyethylene having a thickness from about 0.0003 inches to about 0.003 inches.

51 A sheet material according to claim 41, wherein said film having air vent channels.

52. A sheet material according to claim 51, wherein said air venting channel is at least one aperture disposed within a plurality of said protrusions.

53. A sheet material according to claim 41, wherein said substrate is bonded to said back face of said film with a laminating adhesive.

54. A sheet material according to claim 53, wherein said laminating adhesive having air vent channels.

55. A sheet material according to claim 54, wherein said substrate having air vent channels.

56. A sheet material according to claim 53, wherein said substrate under said protrusions is permeable and contains no laminating adhesive .

57. A sheet material according to claim 41, wherein said substrate having air vent channels.

58. A method for making an adherent sheet material having a film with protrusions, a contact adhesive protected from inadvertent adherence and a substrate bonded to said film, said sheet being adherable to a target surface only when pressed thereagainst, said method comprising the steps of:

- 5 a) coating a forming drum with a contact adhesive, said forming drum having a top surface, said top surface having a plurality of recesses therein, said coating step applying said contact adhesive to said top surface without bridging said recesses;
- b) placing a piece of flexible film in contact with said contact adhesive on said top surface of said forming drum, said contact adhesive preferentially adhering to said piece of
- 10 flexible film;
- c) forming said piece of flexible film to create a plurality of protrusions extending into said recesses of said forming drum, said plurality of protrusions being registered with said contact adhesive;
- d) coating said substrate with a laminating adhesive;

- 15 e) placing said substrate in contact with a back face of said film, wherein said laminating adhesive coating said substrate contacts said back face of said film;
 f) joining said substrate and said film with pressure to form a bonded layer; and
 e) removing said piece of sheet material together with said pressure sensitive adhesive from said forming drum.

59. A method for adhering a sheet material according to claim 1 to a target surface, comprising the steps of:

- (a) positioning said sheet material on said surface with said front face in contact with said surface; and
 5 (b) applying a pressure perpendicular to said back face of said film sufficient to collapse said collapsible protrusions, whereby said contact adhesive comes in contact with said surface.

60. A method according to claim 59, wherein said surface is a vertical surface.

61. A method according to claim 60, wherein said surface is a wall.

62. An article according to claim 1 and instructions for use, comprising

- (a) positioning said sheet material on said surface with said front face in contact with said surface; and
 (c) applying a force perpendicular to and across said substrate sufficient to collapse said collapsible protrusions, whereby said contact adhesive comes in contact with said surface.

ABSTRACT OF THE DISCLOSURE

An adherent sheet material and method of making including at least one adhesive, non-raised region protected from inadvertent adherence to a contact surface. This adherent sheet material also including a film having a front face and back face, wherein the front face has a plurality of collapsible, non-adhesive protrusions extending outwardly from the front face and adhesive, non-raised region disposed between the protrusions. Also, a substrate is bonded to the back face of film. An adherent sheet material including a contact adhesive protected from inadvertent adherence to a contact surface. This adherent sheet material also including a film having a front face and back face, wherein the front face has a plurality of collapsible, non-adhesive protrusions extending outwardly from the front face and adhesive, non-raised region disposed between the protrusions. The film also includes a number density of protrusions from about 50 protrusions per square inch of the film to about 150 protrusions per square inch of the film. Also, the contact adhesive is disposed upon non-raised regions.

FIGURE 1 CROSS-SECTIONAL VIEW

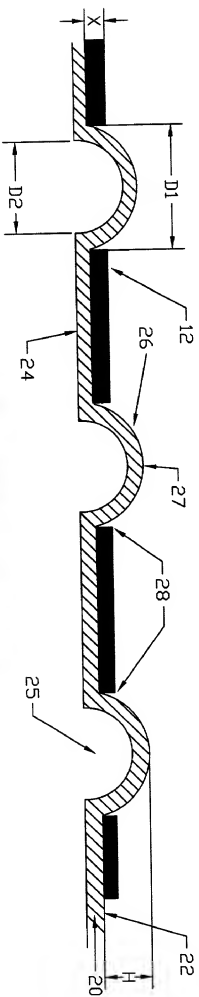


FIGURE 2

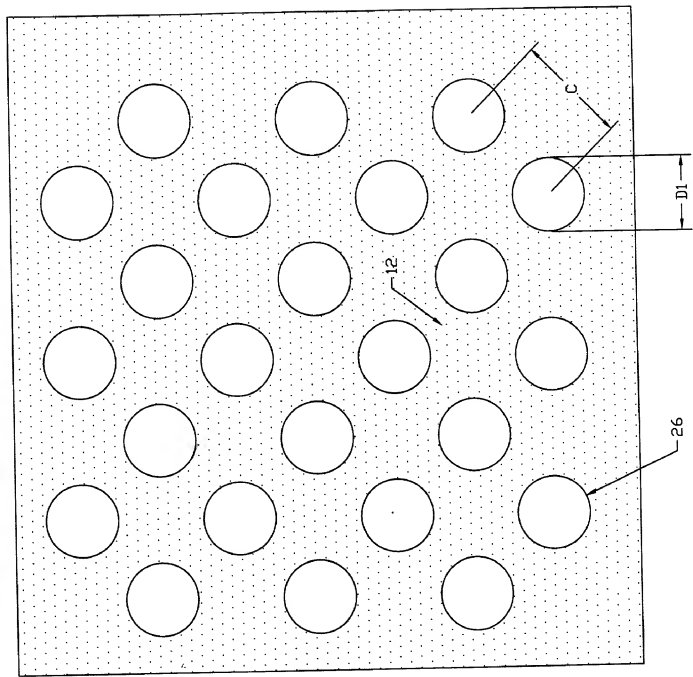
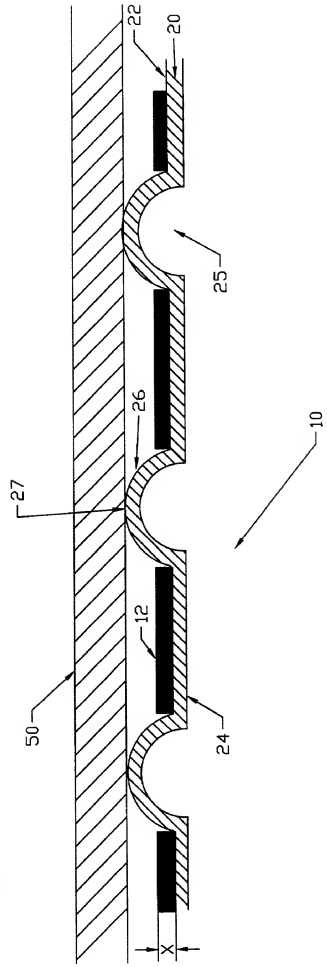


FIGURE 3



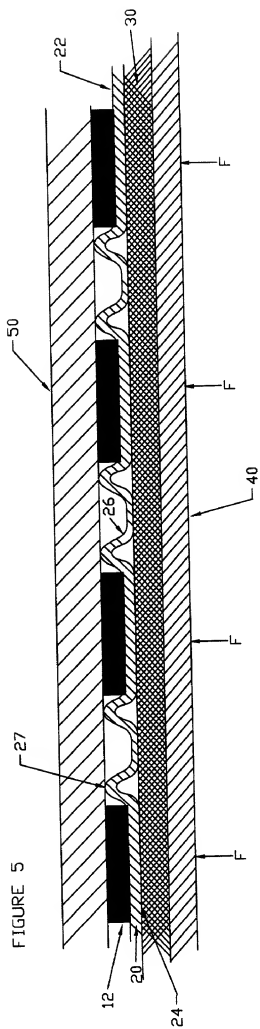


FIGURE 9

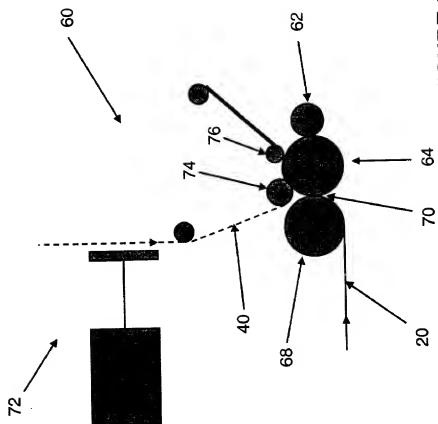


FIGURE 10

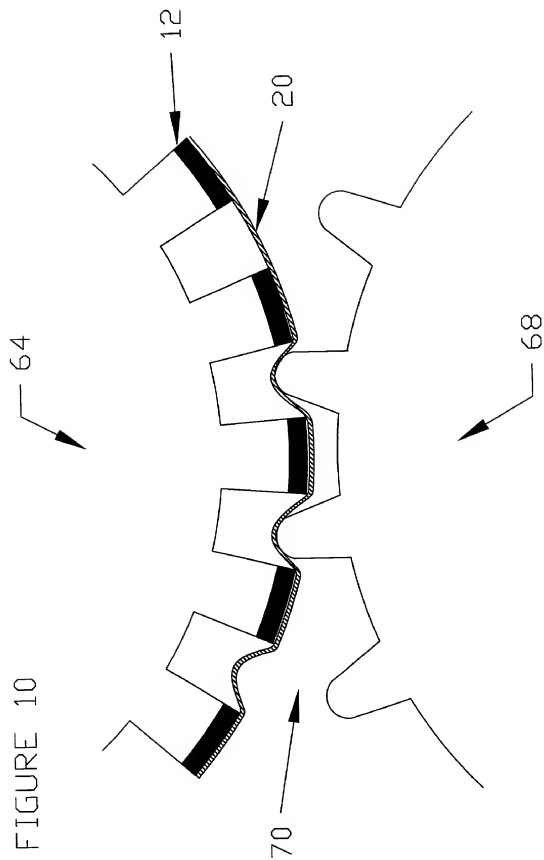


FIGURE 11

